



# Specifications of FTO from Nippon Sheet Glass


Product*	Thickness (mm)	Visible Transmittance (%)	Sheet Resistance ( $\Omega/\square$ )	Haze (%)	FTO Thickness (nm)	Thickness Tolerance (mm)	Size Tolerance (mm)	Flatness
NSG	3.2	$\geq 78$	11 - 13	$\leq 8$	750	$\pm 0.2$	$\pm 0.1$	$\leq 0.3\%$

\*Substrate: Low iron content ( $\leq 0.04\%$ )



## Xop Glass

Parc Científic EspaiTec  
Universitat Jaume I  
12071 Castellon (Spain)  
[info@ftoglass.com](mailto:info@ftoglass.com)  
Phone: +34 964 38 73 51  
[www.ftoglass.com](http://www.ftoglass.com)

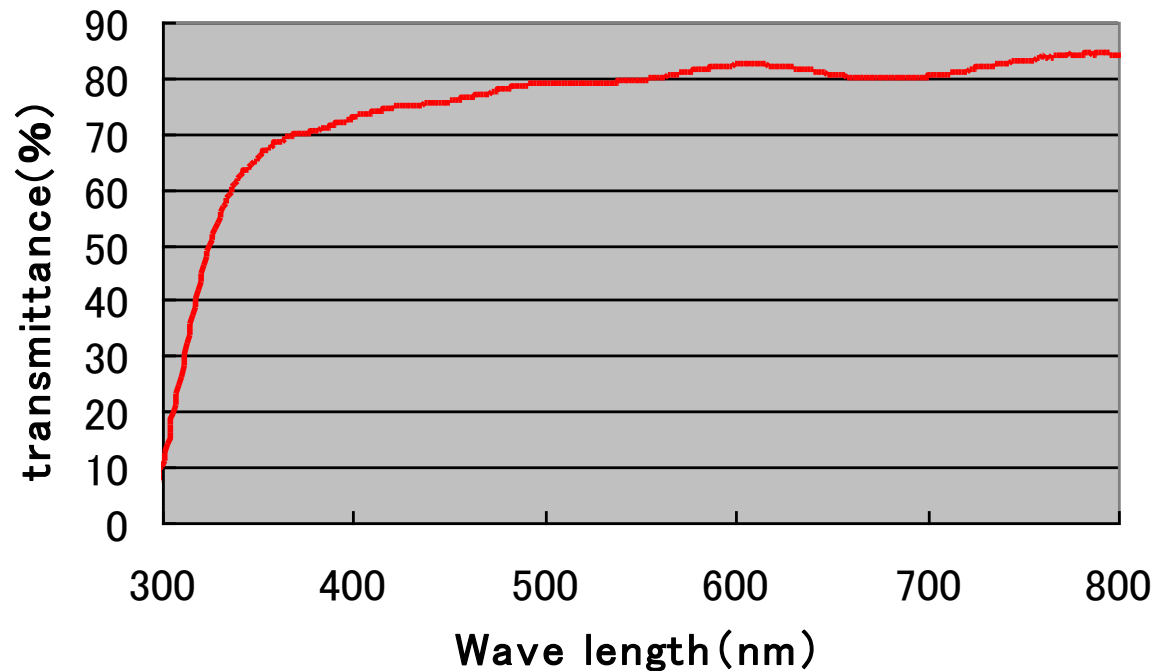

(UV-Visible spectrum from NSG, no guarantee figure)